

AC/DC 36W Enclosed Switching Power Supply

TGR35-xx, TGR35-xx-C, TGR35-xx-Q Series



FEATURES

- Universal 85 - 264VAC or 120 - 373VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- IEC/EN/UL62368, IEC/EN60335, GB4943, IEC/EN61558 safety approval
- Withstand 300VAC surge input for 5s
- Over-voltage class III (designed to meet EN61558)
- Operating altitude up to 5000m



TGR35-xx series is one of Tiger Power's enclosed AC-DC switching power supply. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency and high reliability. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN62368, IEC/EN60335, GB4943, IEC/EN61558 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

Selection Guide

| Certification | Part No.* | Output Power(W) | Nominal Output Voltage and Current (Vo/Io) | Output Voltage Adjustable Range(V) | Efficiency at 230VAC (%) Typ. | Max. Capacitive Load (µF) |
|-----------------|-----------|-----------------|--|------------------------------------|-------------------------------|---------------------------|
| UL, CE, CB, CCC | TGR35-5 | 35 | 5V/7A | 4.5-5.5 | 83 | 8000 |
| | TGR35-12 | 36 | 12V/3A | 10.2-13.8 | 87 | 1500 |
| | TGR35-15 | | 15V/2.4A | 13.5-18 | 89 | 1000 |
| | TGR35-24 | | 24V/1.5A | 21.6-28.8 | 88 | 750 |

Note: *Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.

Input Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|-------------------------|----------------------|-------------|------|------|------|
| Input Voltage Range | AC input | 85 | -- | 264 | VAC |
| | DC input | 120 | -- | 373 | VDC |
| Input Voltage Frequency | | 47 | -- | 63 | Hz |
| Input Current | 115VAC | -- | -- | 0.8 | A |
| | 230VAC | -- | -- | 0.6 | |
| Inrush Current | 115VAC | Cold start | 30 | -- | |
| | 230VAC | | 50 | -- | |
| leakage current | 240VAC | <0.75mA | | | |
| Hot Plug | | Unavailable | | | |

Output Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit |
|-------------------------|--------------------------------------|-------------|-------|------|------|
| Output Voltage Accuracy | Full load range | 5V | ±2 | -- | % |
| | | 12V/15V/24V | ±1 | -- | |
| Line Regulation | Rated load | -- | ±0.5 | -- | |
| Load Regulation | 0% - 100% load | 5V | ±1 | -- | |
| | | 12V/15V/24V | ±0.5 | -- | |
| Ripple & Noise* | 20MHz bandwidth (peak-to-peak value) | 5V | 80 | -- | mV |
| | | 12V/15V | 120 | -- | |
| | | 24V | 150 | -- | |
| Temperature Coefficient | | -- | ±0.03 | -- | %/°C |

AC/DC 35W Enclosed Switching Power Supply

TGR35-xx, TGR35-xx-C, TGR35-xx-Q Series



| | | | | | |
|--|--|---|----|-----|----|
| Minimum Load | | 0 | -- | -- | % |
| Stand-by Power Consumption | | -- | -- | 0.3 | W |
| Hold-up Time | 115VAC | 8 | -- | -- | ms |
| | 230VAC | 30 | -- | -- | |
| Short Circuit Protection | Recovery time <5s after the short circuit disappear. | Hiccup, continuous, self-recovery | | | |
| Over-current Protection | | 110%-200% I _o , self-recovery | | | |
| Over-voltage Protection | 5V | ≤ 6.3VDC (Output voltage clamp or hiccup) | | | |
| | 12V | ≤ 16.2VDC (Output voltage clamp or hiccup) | | | |
| | 15V | ≤ 21.75VDC (Output voltage clamp or hiccup) | | | |
| | 24V | ≤ 33.6VDC (Output voltage clamp or hiccup) | | | |
| Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information. | | | | | |

General Specifications

| Item | Operating Conditions | Min. | Typ. | Max. | Unit | |
|-----------------------|--------------------------------|---|---------------|------|------|--------|
| Isolation | Input - \oplus | 2000 | -- | -- | VAC | |
| | Input-output | 4000 | -- | -- | | |
| | Output - \oplus | 1250 | -- | -- | | |
| Insulation Resistance | Input - \oplus | 100 | -- | -- | MΩ | |
| | Input - output | 100 | -- | -- | | |
| | Output - \oplus | 100 | -- | -- | | |
| Operating Temperature | | -30 | -- | +70 | °C | |
| Storage Temperature | | -40 | -- | +85 | | |
| Storage Humidity | Non-condensing | -- | -- | 95 | %RH | |
| Operating Humidity | Non-condensing | 20 | -- | 90 | | |
| Switching Frequency | | -- | 65 | -- | kHz | |
| Power Derating | Operating temperature derating | -30°C to -25°C | 85VAC-100V AC | 5 | -- | % / °C |
| | | +50°C to +70°C | | 2 | -- | |
| | Input voltage derating | 85VAC - 100VAC | 1.33 | -- | -- | %/VAC |
| Safety Standard | | IEC/EN/UL62368/IEC/EN60335/GB4943/IEC/EN61558 | | | | |
| Safety Certification | | IEC/EN/UL62368/IEC/EN60335/GB4943/IEC/EN61558 | | | | |
| Safety Class | | CLASS I | | | | |
| MTBF | MIL-HDBK-217F@25°C | >300,000 h | | | | |

Mechanical Specifications

| | |
|----------------|--------------------------|
| Case Material | Metal (AL1100, SGCC) |
| Dimension | 99.00 x 82.00 x 30.00 mm |
| Weight | 170g (Typ.) |
| Cooling Method | Free air convection |

Electromagnetic Compatibility (EMC)



| | | | | |
|-----------|---|------------------|---------------------------------------|------------------|
| Emissions | CE | CISPR32/EN55032 | CLASS B | |
| | RE | CISPR32/EN55032 | CLASS B | |
| | Harmonic current | IEC/EN61000-3-2 | CLASS A | |
| Immunity | ESD | IEC/EN 61000-4-2 | Contact ±6KV /Air ±8KV | Perf. Criteria A |
| | RS | IEC/EN 61000-4-3 | 10V/m | perf. Criteria A |
| | EFT | IEC/EN 61000-4-4 | ±2KV | perf. Criteria A |
| | Surge | IEC/EN 61000-4-5 | line to line ±2KV/line to ground ±4KV | perf. Criteria A |
| | CS | IEC/EN61000-4-6 | 10 Vr.m.s | perf. Criteria A |
| | Voltage dip, short interruption and voltage variation | IEC/EN61000-4-11 | 0%, 70% | perf. Criteria B |

AC/DC 35W Enclosed Switching Power Supply

TGR35-xx, TGR35-xx-C, TGR35-xx-Q Series




Product Characteristic Curve

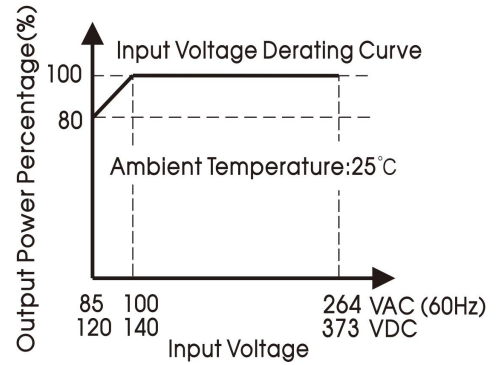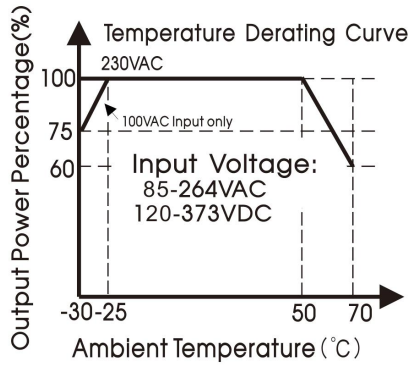


- Note: ① With an input voltage between 85 -100VAC and a DC input between 120-140VDC the output power must be derated as per the temperature derating curves;
 ② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Tiger.

Dimensions and Recommended Layout

TGR35-xx、TGR35-xx-Q Series

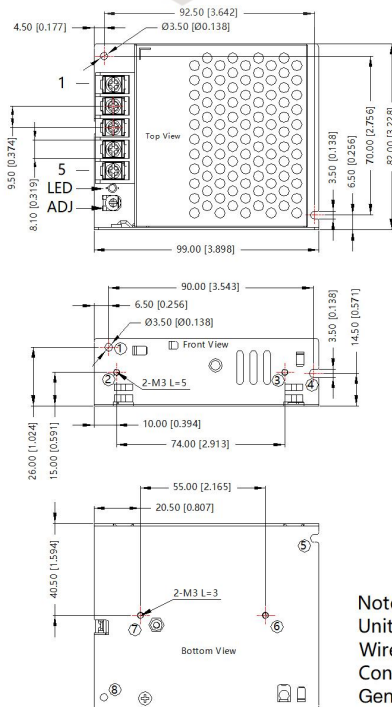


THIRD ANGLE PROJECTION



| Pin-Out | |
|---------|----------|
| Pin | Function |
| 1 | AC(L) |
| 2 | AC(N) |
| 3 | ⊕ |
| 4 | -Vo |
| 5 | +Vo |

①-⑧ any position must be connected to the earth (⊕)

| Position | Screw Spec. | L(max) | Torque(max) |
|----------|-------------|--------|-------------|
| ② - ③ | M3 | 5mm | 0.4N·m |
| ⑥ - ⑦ | M3 | 3mm | 0.4N·m |




Note:
 Unit: mm[inch]
 Wire range: 22-12AWG
 Connector tightening torque: M3.5, 0.8N·m
 General tolerances: ± 1.00[± 0.039]

AC/DC 35W Enclosed Switching Power Supply

TGR35-xx, TGR35-xx-C, TGR35-xx-Q Series



TGR35-xx-C Series

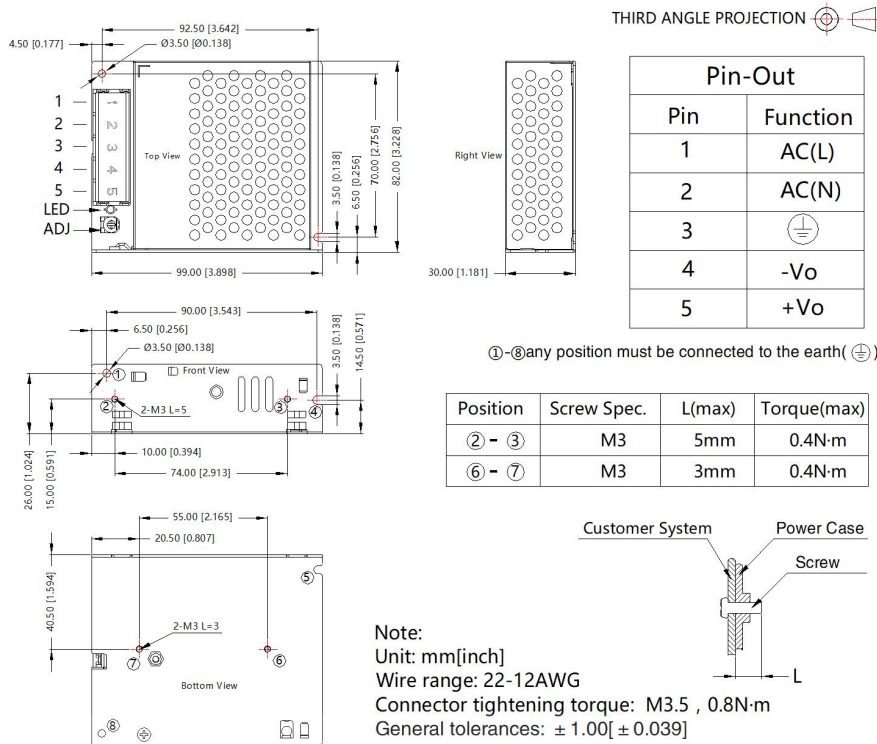

- Note:**
- For additional information on Product Packaging please refer to www.TigerPowerSupplies.com;
 - Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75%RH with nominal input voltage and rated output load;
 - The room temperature derating of $5^{\circ}\text{C}/1000\text{m}$ is needed for operating altitude greater than 2000m;
 - All index testing methods in this datasheet are based on our company corporate standards;
 - In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
 - We can provide product customization service, please contact our technicians directly for specific information;
 - Products are related to laws and regulations: see "Features" and "EMC";
 - The out case needs to be connected to the earth of system when the terminal equipment in operating;
 - Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.