

# 100W Power Supply

TGR100B-XX Ultra Compact High Efficiency Series



## FEATURES

- Universal 80 - 305VAC or 100 - 430VDC input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -40°C to +85°C
- Compact size, high power density
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- OVC III (meet EN62477)
- Operating altitude up to 5000m



TGR100B-XX series is the ultra-small Tiger Power Supplies' second-generation new industrial standard enclosed power supply, which has innovated the industrial power supply standard from the aspect of dimension, performance, technology and structure. It features universal AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and reinforced isolation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, IEC/UL/EN/BS EN62368, EN60335, EN61558, EN62477, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, gaming, security, telecommunications, smart home etc.

## Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Capacitive Load (uF) Max.
EN/CCC, CE UKCA	TGR100B-5	90	5V/18A	4.75-5.75	87.0	10000
	TGR100B-12	102	12V/8.5A	11.4-13.8	90.0	6800
	TGR100B-15	105	15V/7.0A	14.25-17.25	90.0	3300
	TGR100B-24	108	24V/4.5A	22.8-27.6	90.5	2200
	TGR100B-36	100.8	36V/2.8A	34.2-41.4	90.5	1000
	TGR100B-48	110.4	48V/2.3A	43.2-52.8	91.5	470
	TGR100B-54	102.6	54V/1.9A	51.3-56.7	91.5	220

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	80	--	305	VAC
	DC input	100	--	430	VDC
Input Voltage Frequency		47	--	63	Hz
Input Current	115VAC	--	--	3	A
	230VAC	--	--	1.5	
Inrush Current	115VAC	Cold start	--	35	--
	230VAC		--	65	--
Leakage Current	277VAC	<0.75mA			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full load range	5V	±2	--	%
		12V/15V/24V/36V/48V/54V	±1	--	
Line Regulation	Rated load	--	±0.5	--	

# 100W Power Supply

## TGR100B-XX Ultra Compact High Efficiency Series



Load Regulation	0% - 100% load	5V	--	±1	--	
		12V/15V/24V/36V/48V/54V	--	±0.5	--	
Ripple & Noise*	230V, Rated load; 20MHz bandwidth (peak-to-peak value)	5V	--	150	--	mV
		12V/15V	--	120	--	
		24V	--	150	--	
		36V/48V/54V	--	200	--	
Temperature Coefficient			--	±0.03	--	%/°C
Minimum Load			0	--	--	%
Stand-by Power Consumption			--	0.3	0.5	W
Hold-up Time	115VAC		--	10	--	ms
	230VAC		--	55	--	
Short Circuit Protection	Recovery time <5s after the short circuit disappear.		Hiccup, continuous, self-recovery			
Over-current Protection			115% - 200% Io, Hiccup, self-recovery			
Over-voltage Protection	5V		≤7.5VDC (Clamp, self-recovery)			
	12V		≤19.2VDC (Hiccup, self-recovery)			
	15V		≤24VDC (Hiccup, self-recovery)			
	24V		≤38.4VDC (Hiccup, self-recovery)			
	36V		≤57.6VDC (Hiccup, self-recovery)			
	48V		≤60VDC (Clamp, self-recovery)			
	54V		≤70VDC (Hiccup, self-recovery)			
Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.						



### General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input - ⊕	Electric strength test for 1min., leakage current <10mA	2000	--	--	VAC
	Input - output	Electric strength test for 1min., leakage current <5mA	4000	--	--	
	Output - ⊕	Electric strength test for 1min., leakage current <5mA	1250	--	--	
Insulation Resistance	Input - ⊕	Test voltage at 500VDC	100	--	--	MΩ
	Input - output		100	--	--	
	Output - ⊕		100	--	--	
Operating Temperature			-40	--	+85	°C
Storage Temperature			-40	--	+85	
Operating Humidity	Non-condensing		20	--	90	%RH
Storage Humidity			10	--	95	
Switching Frequency			--	80	--	kHz
Power Derating	+45°C to +70°C	5V	1.60	--	--	% / °C
	+50°C to +70°C	12V/15V/24V/36V/48V/54V	2.00	--	--	
	+70°C to +85°C		2.00			
	-40°C to -30°C		5.00	--	--	% / VAC
	80VAC - 100VAC		1.25	--	--	
	277VAC - 305VAC		0.71	--	--	
Safety Standard			Design refer to IEC/UL/EN/BS EN62368-1, EN60335-1, EN61558-1, EN62477-1, GB4943.1			
Safety Class			CLASS I			
MTBF			MIL-HDBK-217F@25°C >300,000 h			



Mechanical Specifications	
Case Material	Metal (AL5052, SGCC)
Dimensions	99.00 x 97.00 x 30.00 mm
Weight	260g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)				
Emissions	CE	CISPR32/EN55032	CLASS B	
	RE	CISPR32/EN55032	CLASS B	
	Harmonic current	IEC/EN61000-3-2	CLASS A	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±4KV	perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line ±2KV/line to PE ±4KV	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	PFMF	IEC/EN61000-4-8	30A/m	perf. Criteria A
	Voltage dip, short interruption and voltage variation	IEC/EN61000-4-11	0%, 70%	perf. Criteria B

**Product Characteristic Curve**

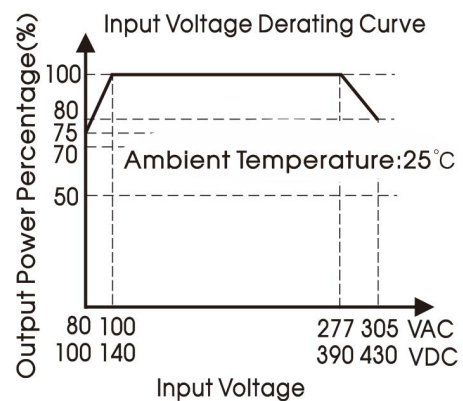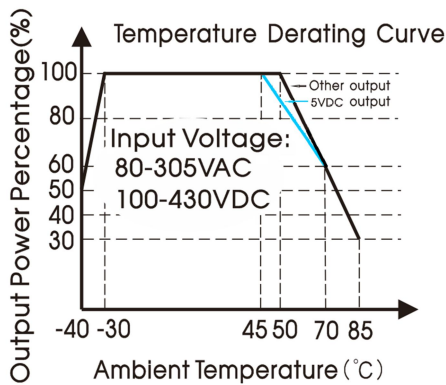


- Note: 1. With an AC input voltage between 80 -100VAC/277-305VAC and a DC input between 100 -140VDC/390-430VDC the output power must be derated as per the temperature derating curves;  
 2. This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

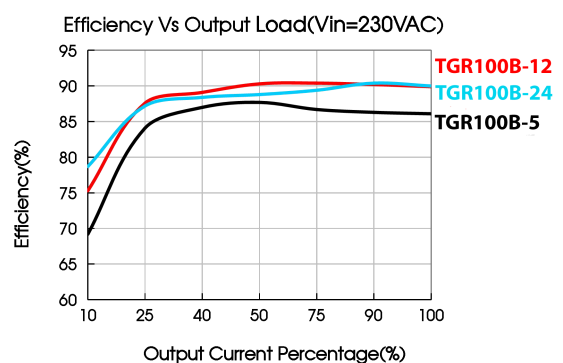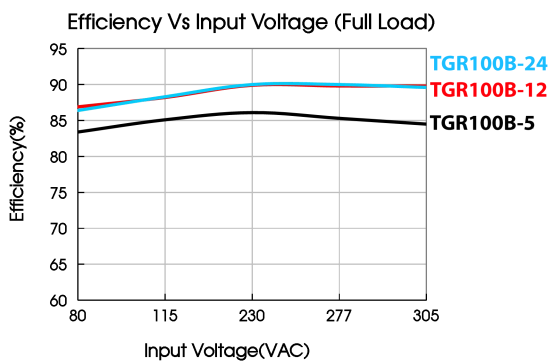

# 100W Power Supply

## TGR100B-XX Ultra Compact High Efficiency Series

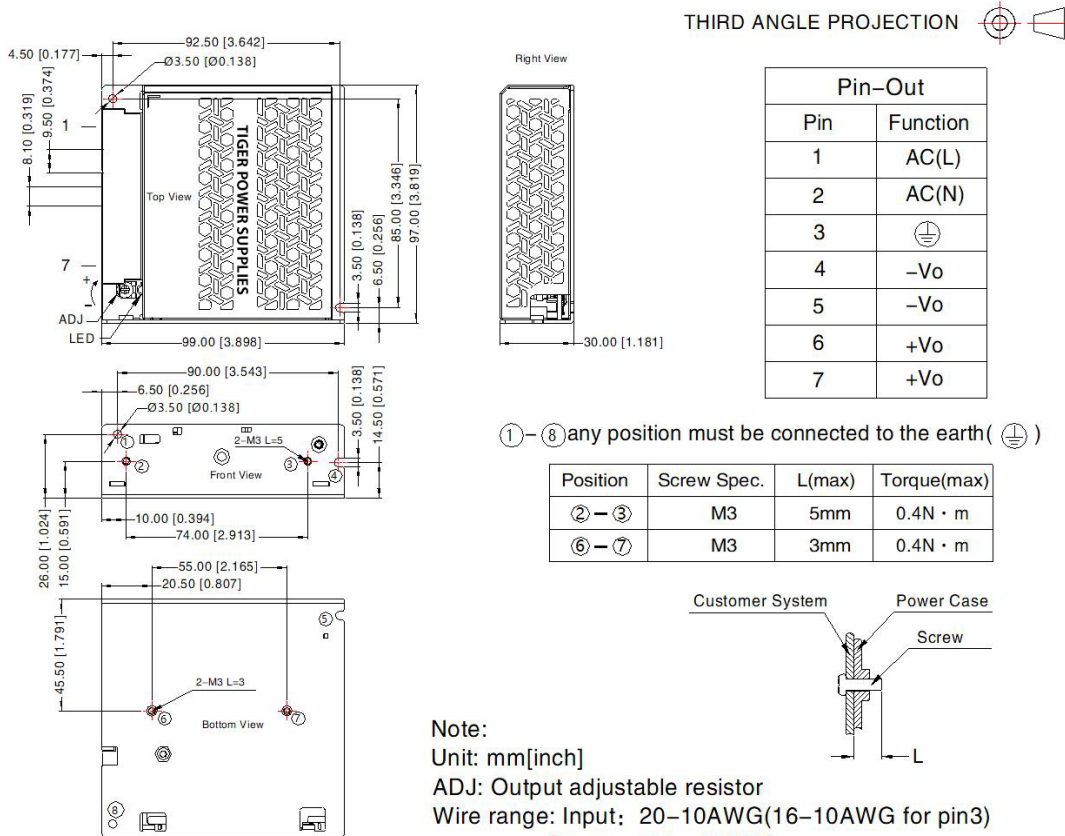

**Note:**

Unit: mm[inch]

ADJ: Output adjustable resistor

Wire range: Input: 20-10AWG(16-10AWG for pin3)

Output: 5V: 10AWG

12V, 15V: 14-10AWG

24V, 36V: 17-10AWG

48V, 54V: 20-10AWG

Connector tightening torque: M3.5, Max 0.8N · m

General tolerances: ± 1.00[ ± 0.039]

**Note:**

- For additional information on Product Packaging please refer to [www.TigerPowerSupplies.com](http://www.TigerPowerSupplies.com)
- less otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75%RH with nominal input voltage and rated output load;
- The room temperature derating of  $5^{\circ}\text{C}/1000\text{m}$  is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to the earth (⊕) of system when the terminal equipment in operating;
- The output voltage can be adjusted by the ADJ, clockwise to increase;
- Our products shall be classified according to and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.