

# AC/DC Converter

## TGO30-xx Series

30W, AC-DC converter



## FEATURES

- Universal 85-264VAC or 100-370VDC input voltage
- 3×2 inch high power density
- Operating ambient temperature range: -25°C to +70°C
- Output short circuit, over-current, over-voltage protection
- High efficiency, high reliability
- Regulated output, low ripple & noise
- EMI performance meets CISPR32/EN55032 CLASS B
- Safety according to UL/EN60335

TGO30-XX series is one of Tiger Power Supplies. compact size power converter. It features universal AC input and at the same time accepts DC input voltage, low power consumption, high efficiency, high reliability, reinforced isolation. It offers good EMC performance compliant to IEC/EN61000-4 and CISPR32/EN55032 and meets UL/EN/IEC62368, EN/UL60335 standards. The converters are widely used in industrial, office and civil applications. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.

## Selection Guide

Certification	Part No.	Output Power	Nominal Output Voltage and Current	Efficiency at 230VAC (%) Typ.	Capacitive Load (μF) Max.
UL/EN/IEC/UKCA	TGO30-03	13.5W	3.3VDC/4100mA	73	24000
	TGO30-05	20.5W	5VDC/4100mA	78	12000
	TGO30-09	30W	9VDC/3333mA	82	5600
	TGO30-12		12VDC/2500mA	84	5400
	TGO30-15		15VDC/2000mA	86	2400
	TGO30-24		24VDC/1250mA	87	1440
	TGO30-48		48VDC/625mA	88	600

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	264	VAC
	DC input	100	--	370	VDC
Input Frequency		47	--	60	Hz
Input Current	115VAC	--	--	750	mA
	230VAC	--	--	450	
Inrush Current	115VAC	--	20	--	A
	230VAC	--	40	--	
Leakage Current	240VAC/50Hz	0.25mA Max.			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	3.3V output	--	±3	--	%
	Other output	--	±2	--	
Line Regulation	Full load	--	±0.5	--	
Load Regulation	0% - 100% Load	--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	--	50	100	mV
Stand-by Power Consumption		--	--	0.5	W
Temperature Coefficient		--	±0.02	--	%/°C
Short Circuit Protection		Hiccup, continuous, self-recovery			

# AC/DC Converter

## TGO30-xx Series



Over-current Protection		≥110%Io, self-recovery			
Over-voltage Protection	3.3VDC/5VDC output	≤7.5V	Output voltage clamp or hiccup		
	9VDC output	≤15V			
	12VDC/15VDC output	≤20V			
	24VDC output	≤30V			
	48VDC output	≤60V			
Minimum Load		0	--	--	%
Hold-up Time	115VAC input	--	10	--	ms
	230VAC input	--	30	--	
Note: * The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.					

General Specifications						
Item	Operating Conditions		Min.	Typ.	Max.	Unit
Isolation	Input - output	Electric Strength Test for 1min., leakage current <5mA	3000	--	--	VAC
Operating Temperature			-25	--	+70	°C
Storage Temperature			-25	--	+85	
Storage Humidity			--	--	90	%RH
Altitude			--	--	2000	m
Soldering Temperature	Wave-soldering		260 ± 5°C; time: 5 - 10s			
	Manual-welding		360 ± 10°C; time: 3 - 5s			
Switching Frequency			--	60	--	kHz
Power Derating	-25°C to -10°C		1.0	--	--	% / °C
	+50°C to +70°C		3.0	--	--	
	85VAC - 140VAC		0.55	--	--	% / VAC
Safety Standard			UL/IEC62368-1 safety approved & EN62368-1, BS EN 62368-1 (Report); Design refer to UL/EN60335-1			
Safety Class			CLASS II			
MTBF			MIL-HDBK-217F@25°C > 300,000 h			

Mechanical Specifications	
Dimension	76.20 x 50.80 x 27.00 mm
Weight	65g (Typ.)
Cooling Method	Free air convection



Electromagnetic Compatibility (EMC)			
Emissions	CE	CISPR32/EN55032	CLASS B
	RE	CISPR32/EN55032	CLASS B
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV Perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m Perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV Perf. Criteria B
	Surge	IEC/EN61000-4-5	Line to line ±1KV Perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s Perf. Criteria A
	Voltage dips, short interruption and voltage variations	IEC/EN61000-4-11	100% dip 1 periods, 30% dip 25 periods, 100% interruptions 250 periods

# AC/DC Converter



TGO30-xx Series



## Product Characteristic Curve

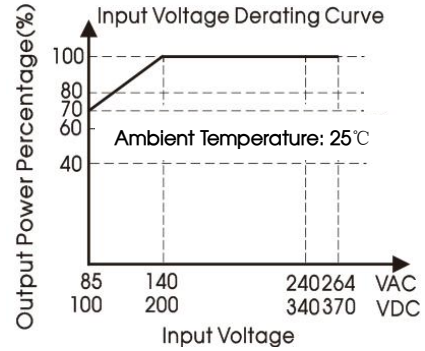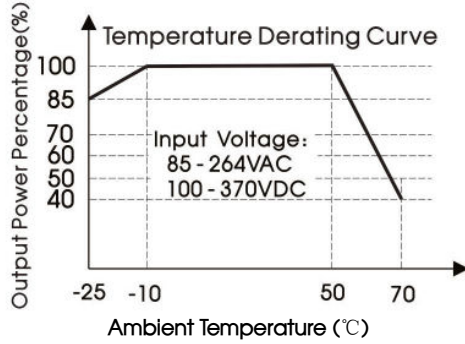

Note: ① With an AC input between 85-140VAC and a DC input between 100-200VDC, the output power must be derated as per temperature derating curves;  
② This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

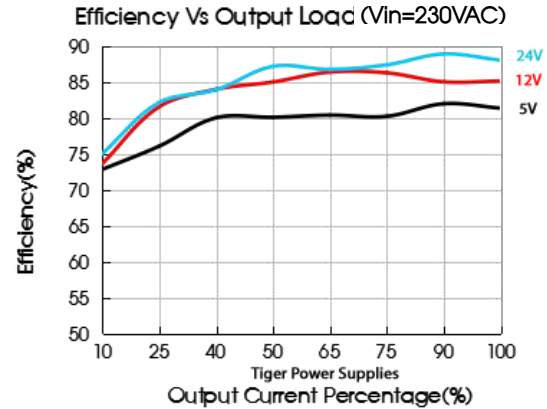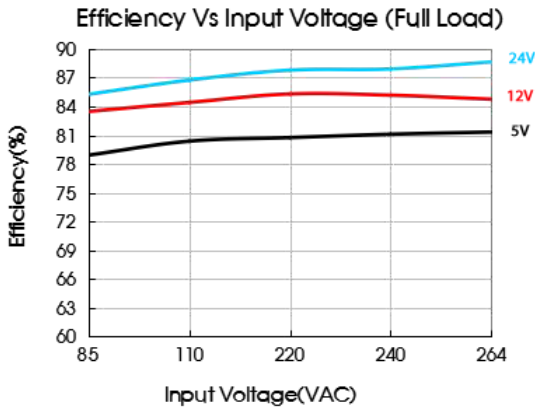

## Design Reference

### 1. Typical application

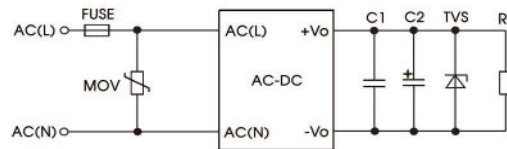


Fig. 1: Typical circuit diagram

Part No.	FUSE	MOV	C1 (μF)	C2 (μF)	TVS
TGO30-03	2A/250V slow-blow	S14K300	0.1	22	SMBJ7.0A
TGO30-05					SMBJ7.0A
TGO30-09					SMBJ12A
TGO30-12					SMBJ20A
TGO30-15					SMBJ20A
TGO30-24					SMBJ30A
TGO30-48					SMBJ64A

#### Output Filter Components:

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.


# AC/DC Converter

TG030-xx Series




## Dimensions and Recommended Layout


THIRD ANGLE PROJECTION

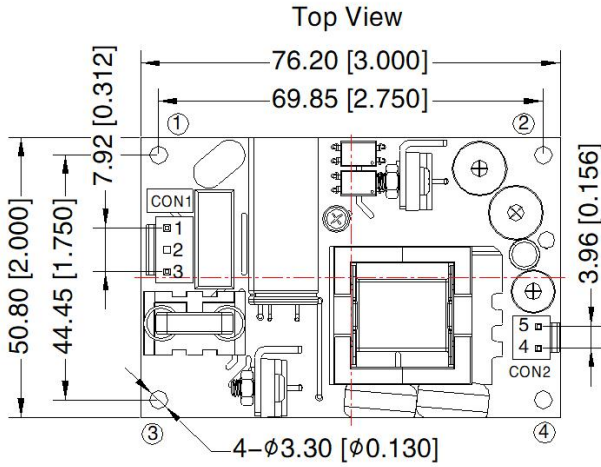

Pin-Out			
Connectors	Pin	Mark	Client Connectors
CON1	1	AC(L)	Housing: JST VHR Contact: JSTSVH-21T-P1.1 or equivalent
	2	NoPin	
	3	AC(N)	
CON2	4	-Vo	Housing: JST VHR Contact: JSTSVH-21T-P1.1 or equivalent
	5	+Vo	

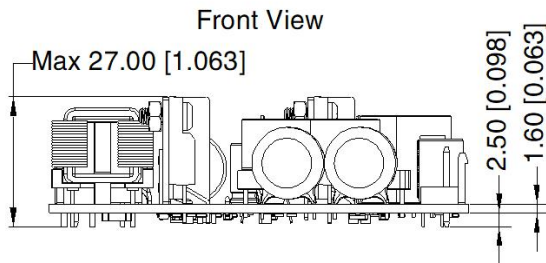

Position	Screw Spec.	L(Recommend)	Torque(max)
① - ④	M3	6mm	0.4N · m

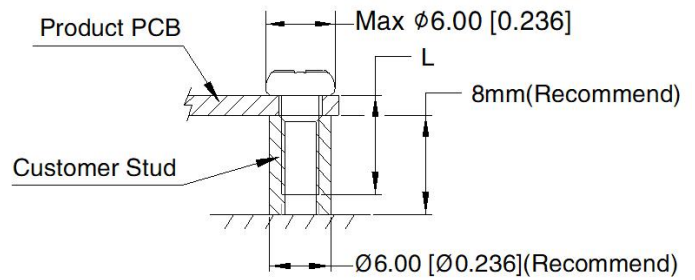

Note:  
Unit: mm[inch]  
General tolerances:  $\pm 0.50$  [ $\pm 0.020$ ]  
The layout of the device is for reference only,  
please refer to the actual product

Note:

- For additional information on Product Packaging please refer to [www.TigerPowerSupplies.com](http://www.TigerPowerSupplies.com)
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75% with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to related environmental laws and regulations, and shall be handled by qualified units.