


10 Port USB 3.0 Industrial Charge & Sync Hub



TIGER PART: TGR-10P-USB-D

- 10 ports @ 2.1A (charge all 10 ports at 2.1A simultaneously)
- 100-240vac input supplied complete with UK power cable
- Charge multiple device and sync data at the same time
- Super Fast USB 3.0 transfer rate of up to 5Gbps
- Dimensions 170 x 80 x 24mm

Six Safety Protection System

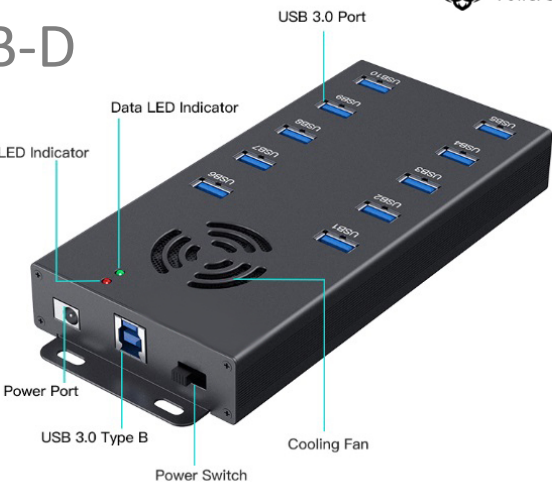

The Tiger Power range of industrial USB chargers are safety approved and highly reliable, meeting latest level VI energy efficiency legislation. The TGR-10P-USB-D model has 10 ports, allowing for an office or classroom to charge and sync their device at the same time via the 10 x 2.1 amp outputs (can charge all 10 ports at the maximum 2.1 amps simultaneously). USB 3.0 spec for ultra fast data sync of up to 5Gbps. Suitable for a wide range of applications.

Part number supplied with UK mains cable, data cable and PSU:	TGR-10P-USB-D
Part number (No UK cable or power supply) :	TGR-10P-USB-D-NCP
Part number (European cable):	TGR-10P-USB-D-EU
Input voltage:	220-240vac (230vac nominal)
Input frequency:	50Hz
Output voltage:	5vdc
Current:	2.1 amps max. x 10 ports
Power :	120W power supply included for 105W max load
Powered by:	Internal high quality power supply (supplied)
Dimensions:	170 x 80 x 244mm
Weight:	750g
AC cord length (where supplied):	2 metres
DC cord length:	Not applicable
DC connector:	USB type A
Polarity:	Standard
Efficiency:	89%
Input current RMS Max.:	2.0A
Inrush Current at 230vac:	120A max. at 220vac cold start, max. load
Load regulation:	+ / - 5%
Safety approval:	62368-1
M.T.B.F:	50,000 hours (MIL-HDBK-217F) at 25 degrees C
Operating temperature:	0°C to + 40°C

TIGER POWER PRODUCTS – QUALITY & RELIABILITY

This specification is not for general release or circulation. Tiger Power reserves the right to make changes to spec. or product without notice or liability.

10 Port USB 3.0 Industrial Charge & Sync Hub






User Manual

10 Port USB Charging HUB

TGR-10P-USB-D



Specification

Model	TGR-10P-USB-D
Product Size	170(L)*80.5(W)*24(H)mm
Color	Black
Case Material	Metal
LED Indicator	Green & Red
Power Adapter	12V 10A
Max Each Output	5V 2100mA
Net Weight	300g
Gross Weight	1100g


Package Contents

1. 10 Port USB Charging hub *1
2. USB 3.0 Cable *1
3. 12V 10A Power Adapter with power cord *1
4. User Manual *1

Safety Instructions

Always read the safety instructions carefully.
If any of the following situations arise, schedule an appointment to have your equipment inspected by a service technician:
*The equipment has been exposed to moisture
*The equipment has been dropped and damaged
*The equipment shows obvious signs of breakage
*The equipment is not functioning properly or is not functioning according to the User Manual instructions

Installation



How to synchronize ('sync') all your attached devices:

1. Connect the power cord to the hub, insert the power plug into the socket of wall mounted, don't need to connect to the computer. (As it will activate sync mode once you connect to the computer)
2. Connect each device to a USB Port with original USB Cable.

How to synchronize ('sync') all your attached devices:

1. Connect your computer to the hub with original USB 3.0 Cable;
2. Connect your devices to the USB ports begin to data syncs;
3. Open the Syncing software (e.g. iTunes/Apple Configurator) on your connected computer and wait until you can see all your devices listed;
4. Sync your devices.

FAQs

How to connect with wireless network card?
A:usb hub is hard device to extend PC usb port, when the wireless network card enters the data communication, if the signal transmission is too large, the mutual interference between the devices will be serious, which may lead to product instability.

Q:What should I do if different voltage in different country?
A:This hub is 12V 10A wide volt age and which suitable for 110-240V.

www.TigerPowerSupplies.com

System Requirements

- Compatible with all USB-enabled operating systems:

Warranty

- 1-year limited warranty

CE ROHS FC UK

TIGER POWER PRODUCTS – QUALITY & RELIABILITY

This specification is not for general release or circulation. Tiger Power reserves the right to make changes to spec. or product without notice or liability.